

## **ВОЛОКОННО-ОПТИЧЕСКИЕ УСИЛИТЕЛИ**

### **ТЕХ. ХАРАКТЕРИСТИКИ**

**По вопросам продаж и поддержки обращайтесь:**

Алматы (7273)495-231  
Ангарск (3955)60-70-56  
Архангельск (8182)63-90-72  
Астрахань (8512)99-46-04  
Барнаул (3852)73-04-60  
Белгород (4722)40-23-64  
Благовещенск (4162)22-76-07  
Брянск (4832)59-03-52  
Владивосток (423)249-28-31  
Владикавказ (8672)28-90-48  
Владимир (4922)49-43-18  
Волгоград (844)278-03-48  
Вологда (8172)26-4159  
Воронеж (473)204-51-73  
Екатеринбург (343)384-55-89  
Иваново (4932)77-34-06  
Ижевск (3412)26-03-58  
Иркутск (395)279-98-46  
Казань (843)206-01-48

Калининград (4012)72-03-81  
Калуга (4842)92-23-67  
Кемерово (3842)65-04-62  
Киров (8332)68-02-04  
Коломна (4966)23-41-49  
Кострома (4942)77-07-48  
Краснодар (861)203-40-90  
Красноярск (391)204-63-61  
Курск (4712)77-13-04  
Курган (3522)50-90-47  
Липецк (4742)52-20-81  
Магнитогорск (3519)55-03-13  
Москва (495)268-04-70  
Мурманск (8152)59-64-93  
Набережные Челны (8552)20-53-41  
Нижний Новгород (831)429-08-12  
Новокузнецк (3843)20-46-81  
Ноябрьск (3496)41-32-12  
Новосибирск (383)227-86-73

Омск (3812)21-46-40  
Орел (4862)44-53-42  
Оренбург (3532)37-68-04  
Пенза (8412)22-31-16  
Петрозаводск (8142)55-98-37  
Псков (8112)59-10-37  
Пермь (342)205-81-47  
Ростов-на-Дону (863)308-18-15  
Рязань (4912)46-61-64  
Самара (846)206-03-16  
Саранск (8342)22-96-24  
Санкт-Петербург (812)309-46-40  
Саратов (845)249-38-78  
Севастополь (8692)22-31-93  
Симферополь (3652)67-13-56  
Смоленск (4812)29-41-54  
Сочи (862)225-72-31  
Ставрополь (8652)20-65-13  
Сургут (3462)77-98-35

Сыктывкар (8212)25-95-17  
Тамбов (4752)50-40-97  
Тверь (4822)63-31-35  
Тольятти (8482)63-91-07  
Томск (3822)98-41-53  
Тула (4872)33-79-87  
Тюмень (3452)66-21-18  
Ульяновск (8422)24-23-59  
Улан-Удэ (3012)59-97-51  
Уфа (347)229-48-12  
Хабаровск (4212)92-98-04  
Чебоксары (8352)28-53-07  
Челябинск (351)202-03-61  
Череповец (8202)49-02-64  
Чита (3022)38-34-83  
Якутск (4112)23-90-97  
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47

Адрес: <https://pritel.nt-rt.ru> || эл.почта: [pei@nt-rt.ru](mailto:pei@nt-rt.ru)


# PMFA Series

## POLARIZATION MAINTAINING OPTICAL FIBER AMPLIFIERS

PriTel's PMFA Series of Polarization Maintaining Optical Fiber Amplifiers are based on well-established diode pumped pure Er and Erbium-Ytterbium co-doped optical fiber technology.

PriTel also manufactures amplifiers with excellent short-pulse performance. Certified shortpulse performance is available for PriTel SP-PMFA High Power Optical Fiber Amplifiers for pulsewidths down to 300 fs.

*PMFA-xx model without power monitor option*

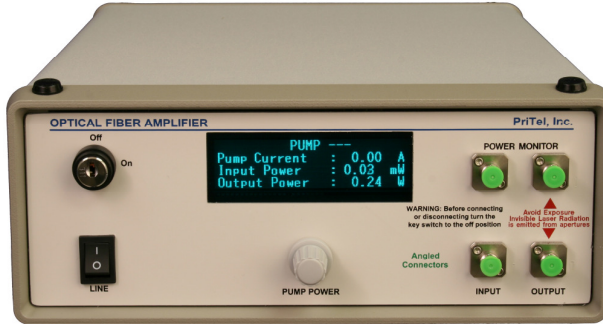


*PMFA-xx model with power monitor option*

### Specifications


	<b>PMFA-15</b>	<b>PMFA-24</b>	<b>PMFA-27</b>	<b>PMFA-30</b>
Saturated output power	15 dBm	24 dBm	27 dBm	30 dBm
Signal gain	30 dB @ -20 dBm	>40 dB @ -20 dBm >45 dB @ -30 dBm	27 dB @ 0 dBm	30 dB @ 0 dBm
Optical noise figure	< 3 dB @ -20 dBm	< 4.5 dB @ -20 dBm	< 7 dB @ 0 dBm	< 8 dB @ 0 dBm
Input power range	-30 to +10 dBm	-20 to +20 dBm	-10 to +20 dBm	-3 to +20 dBm
Wavelength range	1528-1565 nm	1528-1565 nm	1535-1565 nm	1535-1565 nm
Spectral gain flatness (single channel input)	0.5 dB typical	0.5 dB typical	1.0 dB typical	1.0 dB typical
Minimum distortion-free pulse width (standard)	1.0 ps	1.0 ps	1.5 ps	1.5 ps
ACC	Standard	Standard	Standard	Standard
APC, ALC	Optional	Optional	Optional	Optional
Dimensions	10 cm x 26 cm x 28 cm	10 cm x 26 cm x 36 cm	10 cm x 26 cm x 36 cm	10 cm x 26 cm x 36 cm
<b>Optical</b>				
Gain medium	Er doped core pumped silica fibers for models PMFA-15 to PMFA-24		Er/Yb, double-clad silica fiber for models PMFA-27 to PMFA-30	
Pump source	Diode laser (910-980 nm)			
Connectors	FC/APC (other connectors available upon request)			
<b>Environmental</b>				
Operating temperature	+15 to 30°C	Storage temperature		-20 to 50°C
<b>Electrical/ Mechanical</b>				
Operating Voltage	85-264 VAC at 47-63 Hz			
Power consumption	< 50 W			

# Typical Performance of Polarization Maintaining Optical Fiber Amplifiers

## Er doped, Core Pumped Fibers

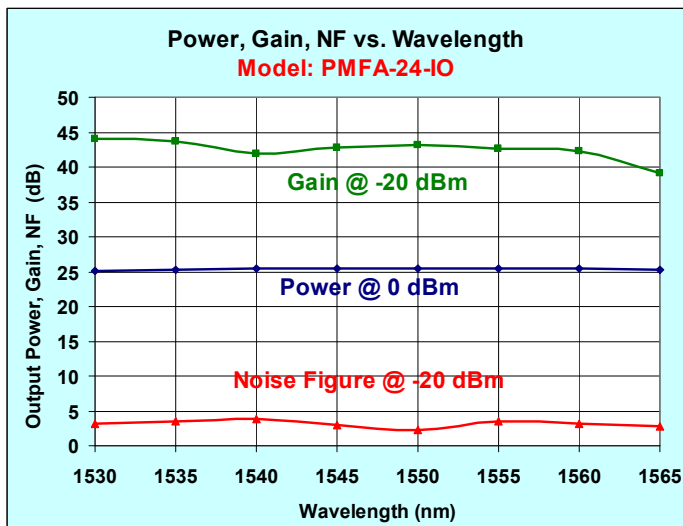


## Er/Yb, Cladding Pumped Fibers

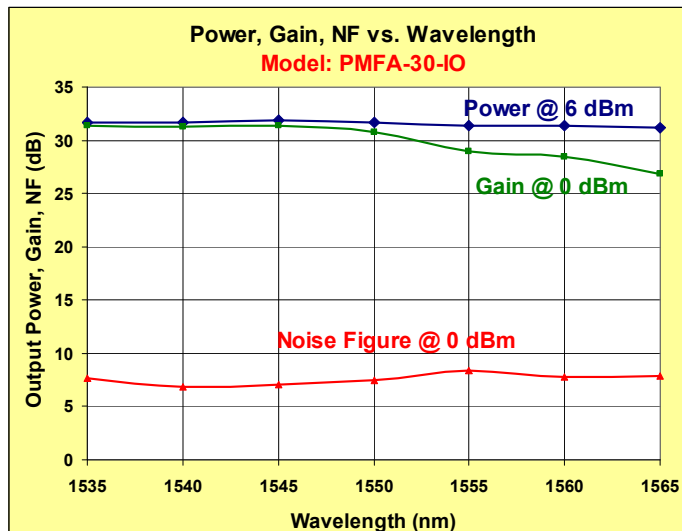


### Output Optical Spectrum @ -10 dBm Input

Model: PMFA-24-IO

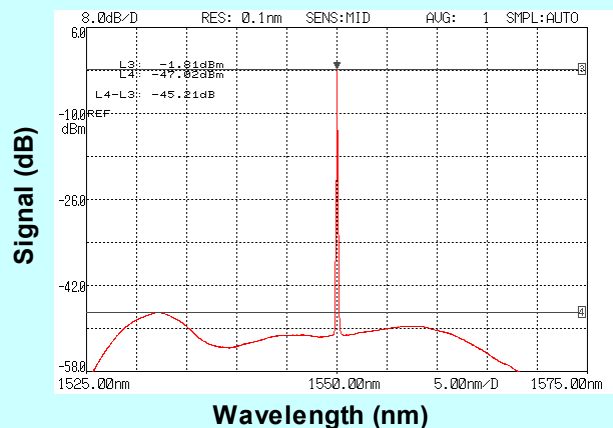


### Output Optical Spectrum @ 6 dBm Input

Model: PMFA-30-IO

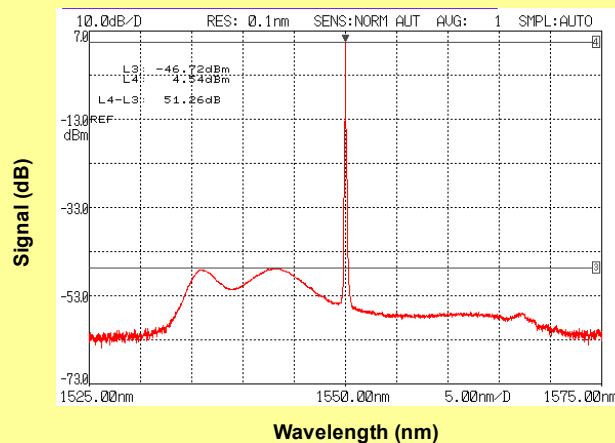


### Pump Current vs. Output Power

Model: PMFA-24-IO

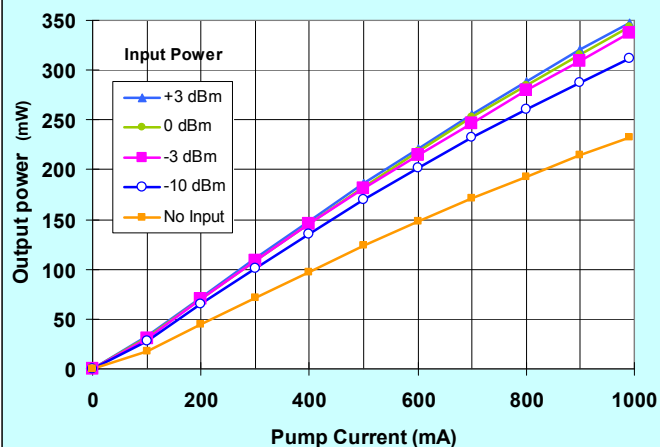

### Pump Current vs. Output Power

Model: PMFA-30-IO

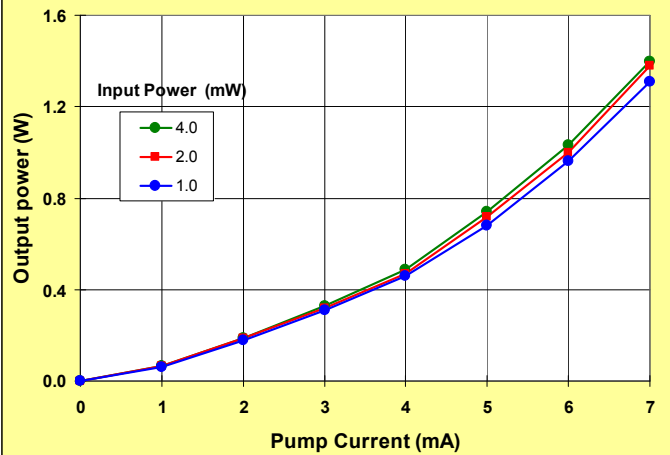

## По вопросам продаж и поддержки обращайтесь:

Алматы (7273)495-231  
Ангарск (3955)60-70-56  
Архангельск (8182)63-90-72  
Астрахань (8512)99-46-04  
Барнаул (3852)73-04-60  
Белгород (4722)40-23-64  
Благовещенск (4162)22-76-07  
Брянск (4832)59-03-52  
Владивосток (423)249-28-31  
Владикавказ (8672)28-90-48  
Владимир (4922)49-43-18  
Волгоград (844)278-03-48  
Вологда (8172)26-4159  
Воронеж (473)204-51-73  
Екатеринбург (343)384-55-89  
Иваново (4932)77-34-06  
Ижевск (3412)26-03-58  
Иркутск (395)279-98-46  
Казань (843)206-01-48

Калининград (4012)72-03-81  
Калуга (4842)92-23-67  
Кемерово (3842)65-04-62  
Киров (8332)68-02-04  
Коломна (4966)23-41-49  
Кострома (4942)77-07-48  
Краснодар (861)203-40-90  
Красноярск (391)204-63-61  
Курск (4712)77-13-04  
Курган (3522)50-90-47  
Липецк (4742)52-20-81  
Магнитогорск (3519)55-03-13  
Москва (495)268-04-70  
Мурманск (8152)59-64-93  
Набережные Челны (8552)20-53-41  
Нижний Новгород (831)429-08-12  
Новокузнецк (3843)20-46-81  
Ноябрьск (3496)41-32-12  
Новосибирск (383)227-86-73

Омск (3812)21-46-40  
Орел (4862)44-53-42  
Оренбург (3532)37-68-04  
Пенза (8412)22-31-16  
Петрозаводск (8142)55-98-37  
Псков (8112)59-10-37  
Пермь (342)205-81-47  
Ростов-на-Дону (863)308-18-15  
Рязань (4912)46-61-64  
Самара (846)206-03-16  
Саранск (8342)22-96-24  
Санкт-Петербург (812)309-46-40  
Саратов (845)249-38-78  
Севастополь (8692)22-31-93  
Симферополь (3652)67-13-56  
Смоленск (4812)29-41-54  
Сочи (862)225-72-31  
Ставрополь (8652)20-65-13  
Сургут (3462)77-98-35

Сыктывкар (8212)25-95-17  
Тамбов (4752)50-40-97  
Тверь (4822)63-31-35  
Тольятти (8482)63-91-07  
Томск (3822)98-41-53  
Тула (4872)33-79-87  
Тюмень (3452)66-21-18  
Ульяновск (8422)24-23-59  
Улан-Удэ (3012)59-97-51  
Уфа (347)229-48-12  
Хабаровск (4212)92-98-04  
Чебоксары (8352)28-53-07  
Челябинск (351)202-03-61  
Череповец (8202)49-02-64  
Чита (3022)38-34-83  
Якутск (4112)23-90-97  
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47

Адрес: <https://pritel.nt-rt.ru> || эл.почта: [pei@nt-rt.ru](mailto:pei@nt-rt.ru)